


Fire Rated Enclosed Switchgear

CDPD214 Issue 1

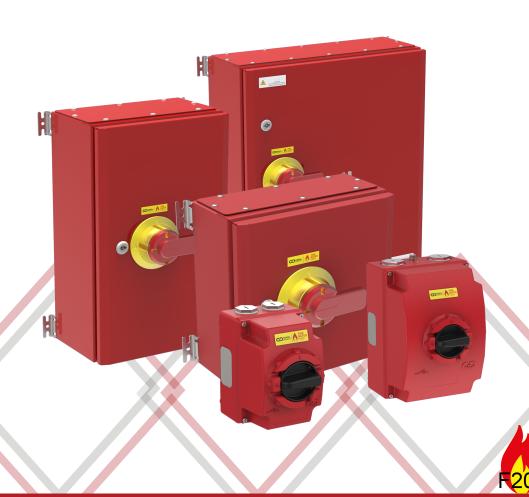

Product Introduction

Product Features

Craig & Derricott offer one of the most extensive range of Fire Rated Switchgear in the market.

These switch-disconnectors are installed near to the extraction fan for isolation purposes, and have been tested in conjunction with the fan equipment to meet the stringent thermal requirements of BS EN 12101-3.

When using enhanced fire resistant power cables, please check gland sizes to suite the required product

- Available 20A to 1250A.
- Supplied in IP65 die-cast aluminium or sheet steel enclosures.
- Designed specifically for where the supply must be maintained for 2 hours at either 400°C dependant on the range required.
- Fully tested and certified to BS EN 12101-3.
- Base mounted switch for easy installation.
- All F400 products are suitable for F300 applications.



Contact Ian directly for fire rated switchgear enquiries
Tel: 07747 560794 Email: Istretton@craigandderricott.com

