

Technical Data Sheet

Sheet Steel Enclosed Switchgear Range

CDPD120
Issue 4

General Description

A range of sheet steel enclosed isolation equipment sealed to IP66, providing the user with a robust and cost effective assembly. Each unit is supplied with a polyester powder coated finish in Light Grey (RAL 7035). External mounting feet in stainless steel are offered as an accessory sized to match each enclosure. Size A- Cat. No. EFA / Size B- Cat. No. EFB

All units have a padlockable handle which allow for the insertion of up to three padlocks in the 'Off' position thus preventing the isolator being switched to the 'On' position. All units are interlocked in the ON position preventing the lid from being removed. Standard shackle diameter $\varnothing 6.4$ Earth continuity terminals are provided in the base and lid of each enclosure. A selection of auxiliary blocks can be provided as additional contacts as well as a choice of Neutral assemblies.

*Corrosive Environment



When choosing an enclosure, care must be taken to select the most suitable material taking into account the location, level of pollution, temperature, UV levels, vibration and humidity.

Typical enclosure materials include Aluminium, powder coated Mild Steel or Stainless Steel. Enclosures that are sealed to IP66 are commonly mistaken as being suitable for all outside environments. A powder coated mild steel or Aluminium enclosure will degrade and corrode under certain environmental conditions.

Installing enclosures in an external environment may also result in condensation forming on the inside of the enclosure, resembling water ingress. This is caused by a difference in temperature between inner and outer surfaces of the enclosure and the most common solution is to fit an anti-condensation heater and breather gland within the enclosure.

When the product is subject to chemical cleaning a stainless steel enclosure is recommended although the correct grade of stainless steel must be selected. If in doubt, please consult our technical department on sales@craigandderricott.com or +44(0)1543 375 541.



'N' = switched neutral (Early make, late break) | 'NL' = Unswitched neutral | 'EB' = Early break auxiliary contacts

Switch-Disconnectors (O-I)									
Image	Rating	Interior Switch	Format	Cat. No.	IP Rating	Encl. Size	Encl. Material	Encl. Colour	Cable Entries
	20A	GX20	6P	SDMG206	IP66	A	Sheet Steel	Light Grey RAL 7035	2 x M20
			6P+2EB Aux	SDMG206EB					
	25A	CS25	2P	SDMG252	IP66	A	Sheet Steel	Light Grey RAL 7035	2 x M20
			3P	SDMG253					
			3P+NL	SDMG253NL					
			3P+N	SDMG253N					
			3P+2EB Aux	SDMG253EB					
	32A	CS32	2P	SDMG322	IP66	A	Sheet Steel	Light Grey RAL 7035	2 x M20
			3P	SDMG323					
			3P+NL	SDMG323NL					
			3P+N	SDMG323N					
			3P+2EB Aux	SDMG323EB					
	40A	CS40R	2P	SDMG402	IP66	B	Sheet Steel	Light Grey RAL 7035	2 x M20 + 2 x M25
			3P	SDMG403					
			3P+NL	SDMG403NL					
			3P+N	SDMG403N					
			3P+2EB Aux	SDMG403EB					
	GX40	6P	SDMG406	IP66	B	Sheet Steel	Light Grey RAL 7035	2 x M20 + 2 x M25	
		6P+2EB Aux	SDMG406EB						
	63A	CS63	2P	SDMG632	IP66	B	Sheet Steel	Light Grey RAL 7035	2 x M20 + 2 x M25
			3P	SDMG633					
			3P+NL	SDMG633NL					
			3P+N	SDMG633N					
			3P+2EB Aux	SDMG633EB					
	6P	SDMG636	C	-					

Technical Data Sheet

Sheet Steel Enclosed Switchgear Range

CDPD120
Issue 4

Switch-Disconnectors (O-I)									
Image	Rating	Interior Switch	Format	Cat. No.	IP Rating	Encl. Size	Encl. Material	Encl. Colour	Cable Entries
	80A	GA080A	2P	SDMG802	IP66	C	Sheet Steel	Light Grey RAL 7035	-
			3P	SDMG803					
			3P+1EB	SDMG803/1EB					
			3P+N	SDMG803N					
			3P+NL	SDMG803NL					
	100A	GA0100A	2P	SDMG1002	IP66	C	Sheet Steel	Light Grey RAL 7035	-
			3P	SDMG1003					
			3P+1EB	SDMG1003/1EB					
			3P+N	SDMG1003N					
			3P+NL	SDMG1003NL					
Changeover Switch-Disconnectors (I-O-II)									
	20A	GX20	2P	SCODMG202	IP66	A	Sheet Steel	Light Grey RAL 7035	2 x M20
			3P	SCODMG203					
			4P	SCODMG204					
	40A	GX40	2P	SCODMG402	IP66	B	Sheet Steel	Light Grey RAL 7035	2 x M20 + 2 x M25
			3P	SCODMG403					
			4P	SCODMG404					
			4P	SCODMG404					

Accessories

All of the accessories listed below can be retrofitted. One block can be fitted either side of the main assembly on all of the 3 pole Switch-Disconnector interiors.

Description	Cat. No.
Auxiliary Contact- 2 Early Break	SAUX2EB
Auxiliary Contact- 1 N/O + 1 N/C	SAUXCO
80A- 100A Auxiliary Contact- 1 Early Break for GA switches	SAUX1EBL
80A- 100A Auxiliary Contact- 1 N/O + 1 N/C for GA switches	SAUXCOL
25A- 40A Compact Neutral (Unswitched)	SNLC40
63A Neutral (Unswitched)	SNL63
80A- 100A Neutral (Unswitched) for GA switches	SNL100L
25A Neutral (Switched)	SSP25
40A Neutral (Switched)	SSP40
63A Neutral (Switched)	SSP63
80A Neutral (Switched) for GA switches	SSP80L
100A Neutral (Switched) for GA switches	SSP100L
External Fixing Feet for 20A- 32A	EFA
External Fixing Feet for 40A- 63A	EFB
External Fixing Feet for 80A- 100A	EFC









Technical Data Sheet

Sheet Steel Enclosed Switchgear Range


CDPD120
Issue 4

Technical Specification

Data supplied against tests to IEC/BS EN 60947-3

Application	Sym.	Unit	Category	20A	25A	32A	40A	63A	80A	100A	
Interior Switch	-	-		GX20	CS25	CS32	GX40	CS40R	CS63	GA080A	GA0100A
Rated thermal current	I_{the}	A		20	25	32	40	40	63	80	100
Rated insulation voltage	U_i	V		690	690	690	690	690	690	1000	1000
Rated impulse voltage	U_{imp}	kV		6	6	6	6	6	6	8	8
Rated operational Current	I_e	A	400V- AC23A (3 phase AC 50/60Hz)	15	25	32	35	32	60	80	100
Rated operational power (3 phase AC)		kW	380/440- AC23	7.5	11	15	18.5	15	25	45	55
			500V- AC23	7.5	15	15	15	15	30	-	-
			690V- AC23	7.5	15	15	15	15	30	45	45
Rated short time withstand current (1 sec)	I_{tw}	A		250	500	600	800	600	1300	2500	2500
Max. fuse size for short circuit protection (gG Characteristic)		kA	10kA	20	35	35	40	40	80	-	-
			25kA	16	32	32	35	32	63	-	-
			50kA	-	32	32	-	32	63	80	100
Recommended connecting capacity	-		Terminal type								
	mm ²		Flexible cable	2.5 x 2	6	6	6 x 2	6	16	50	50
	mm ²		Rigid cable	2.5 x 2	10	10	10 x 2	10	25	70	70
	Nm		Tightening torque	1.0	1.2	1.2	1.0	1.2	1.2	5.6	5.6

Dimensions

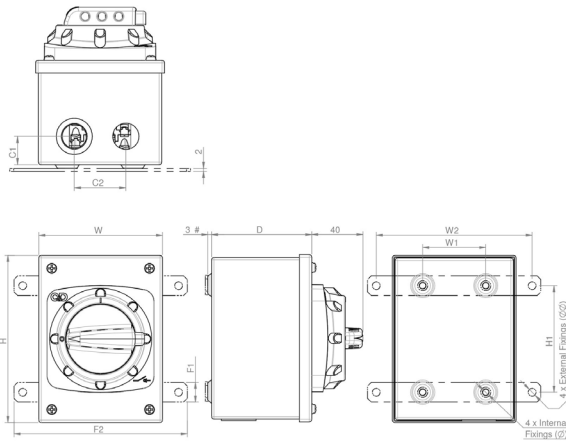

Encl. Size	Overall Dims.		
	H	W	D
A	135	100	80
B	175	130	100
C	310	200	100

Encl. Size	Fixing Details					
	W1	W2	F1	F2	∅	∅∅
A	51	126	16	140	5.5	6.35
B	81	155	16	178	5.5	6.35
C	146	228	20	249	5.5	6.35